




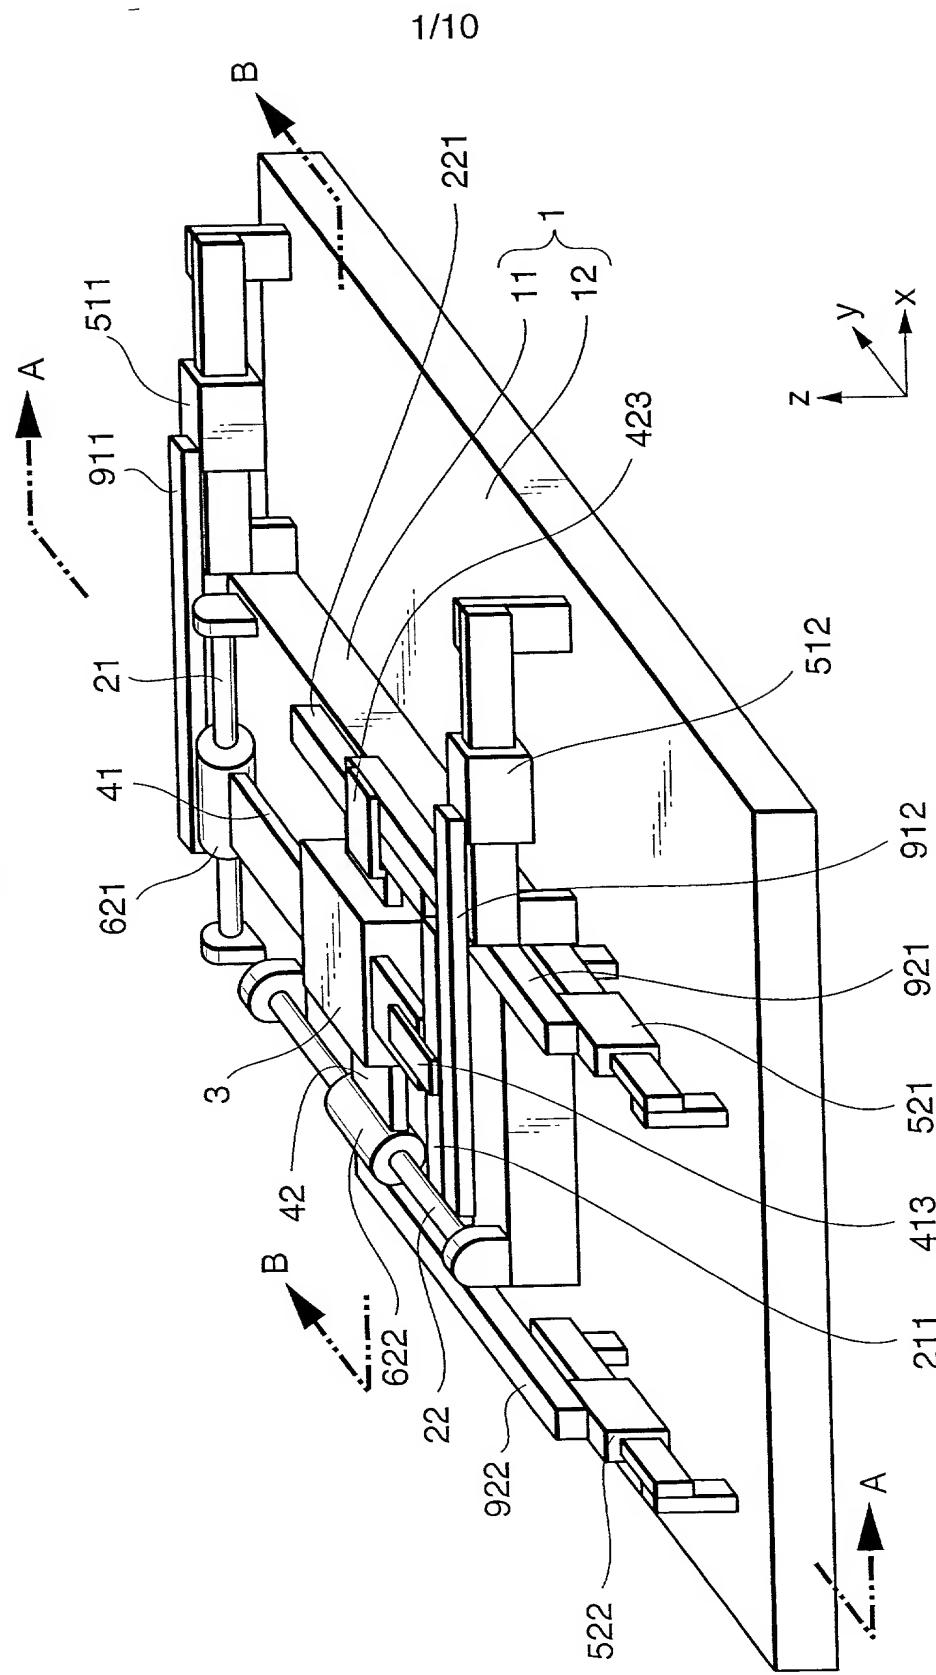
**FIG. 1**


FIG. 2

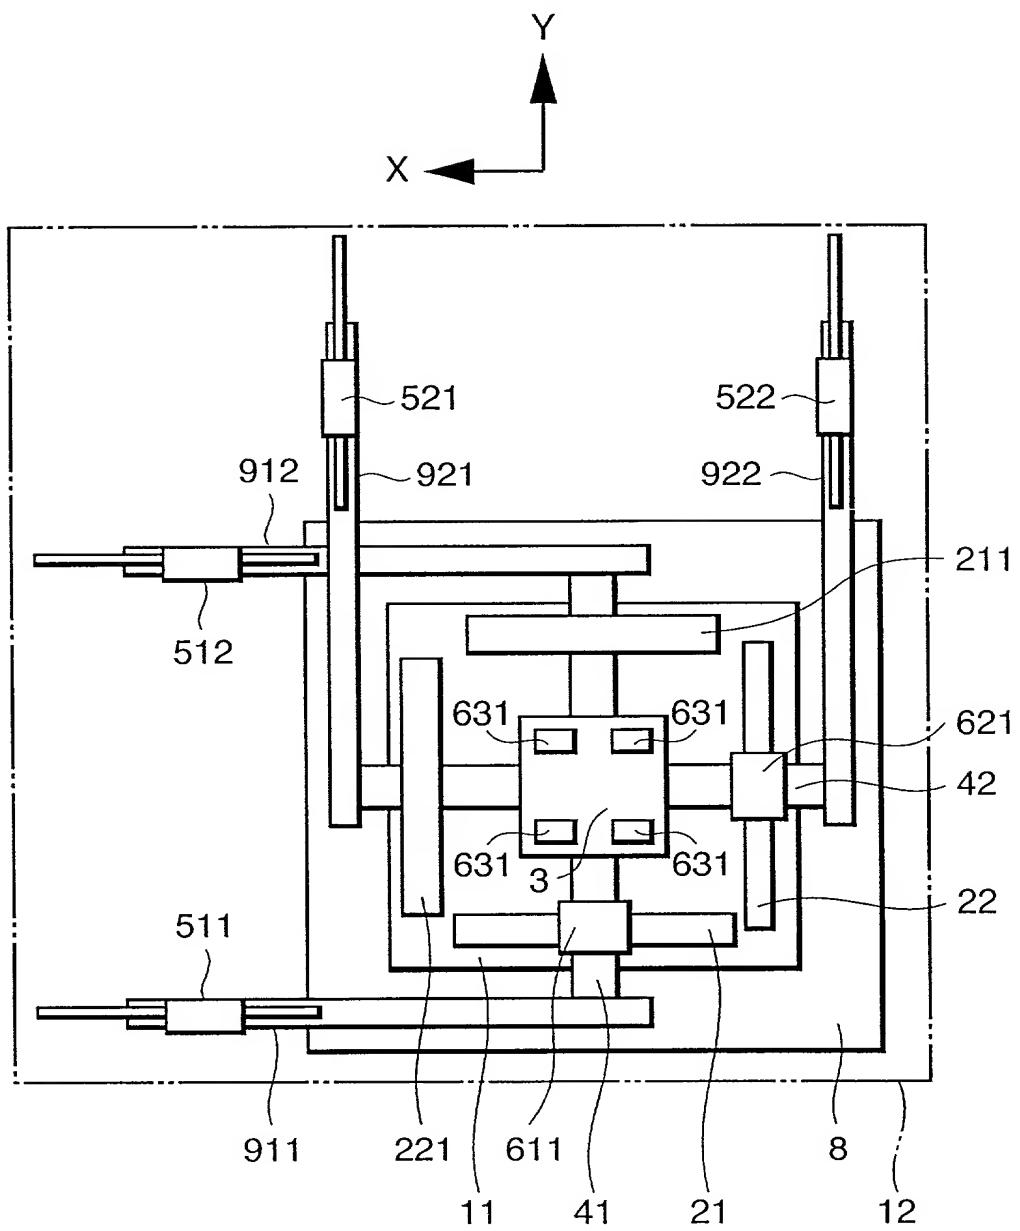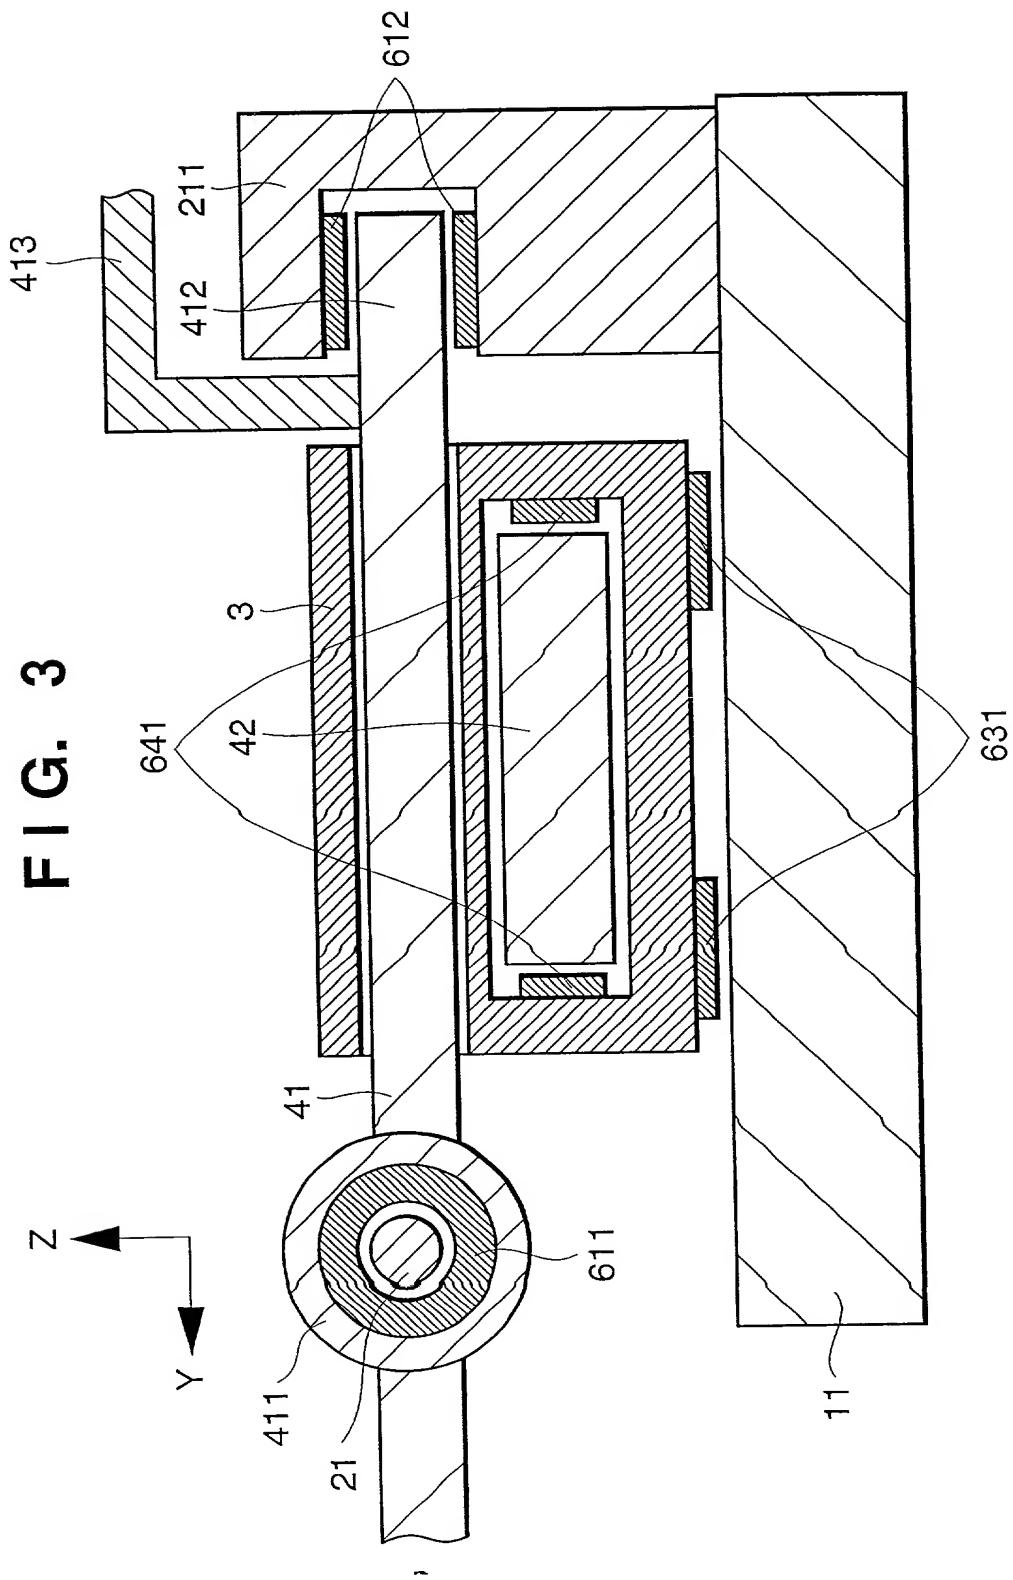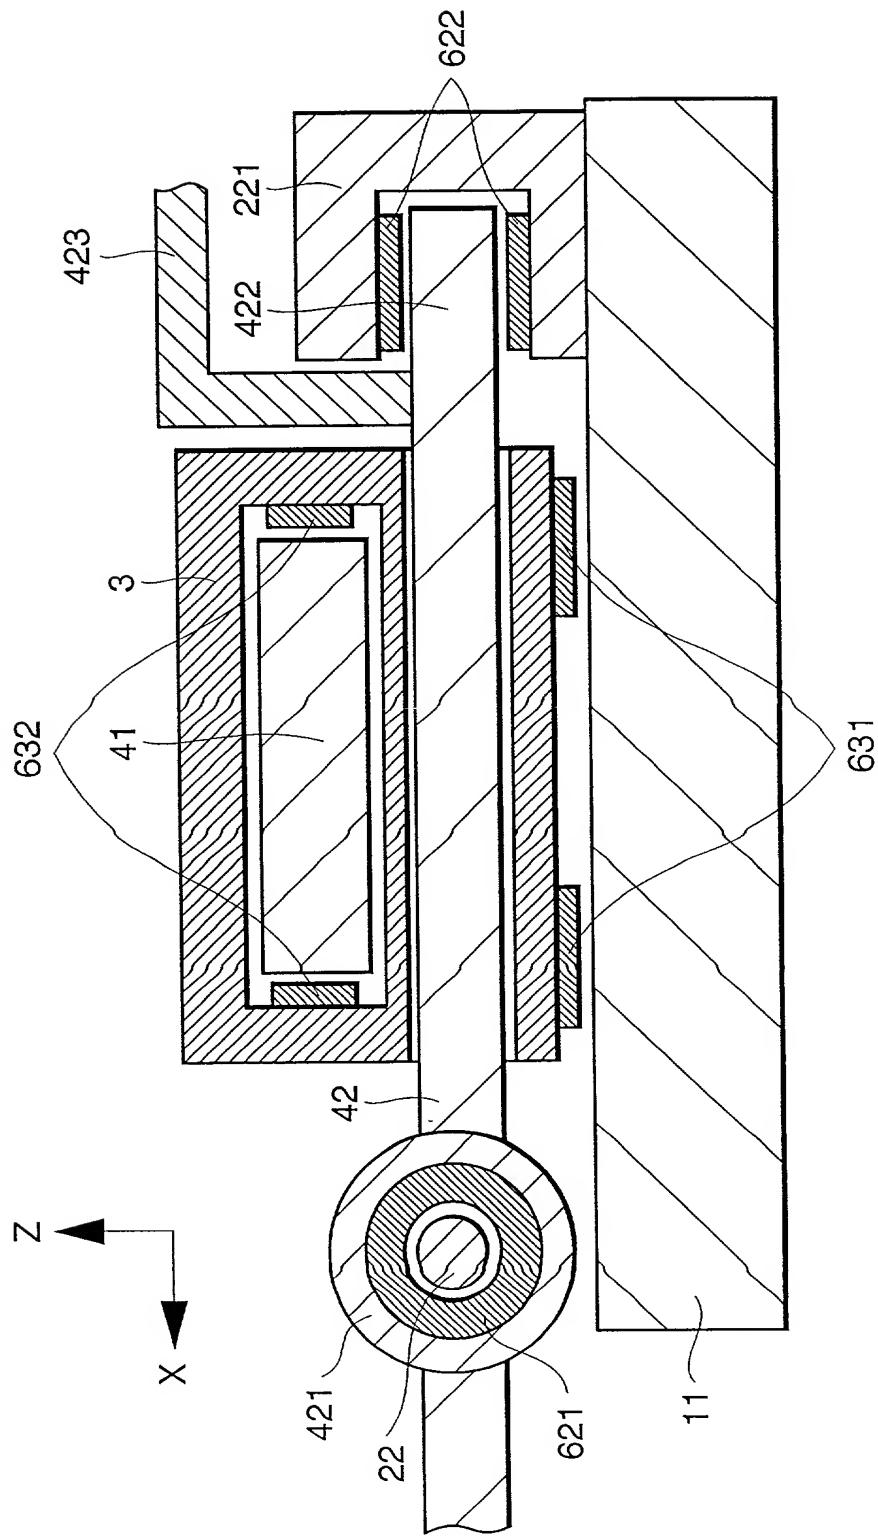


4,500,904,634,030,502




**FIG. 4**

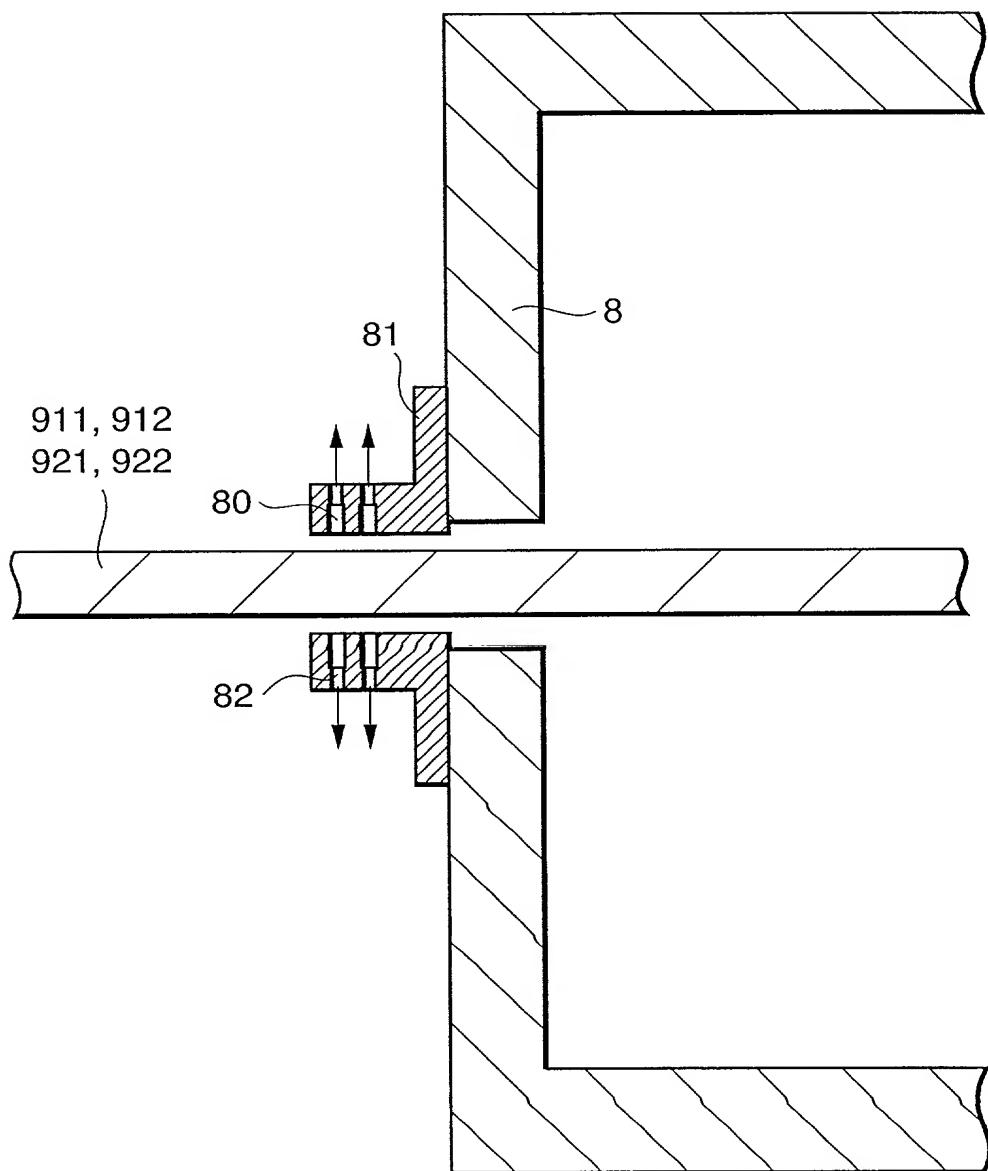**F I G. 5**

100960163 · 030502

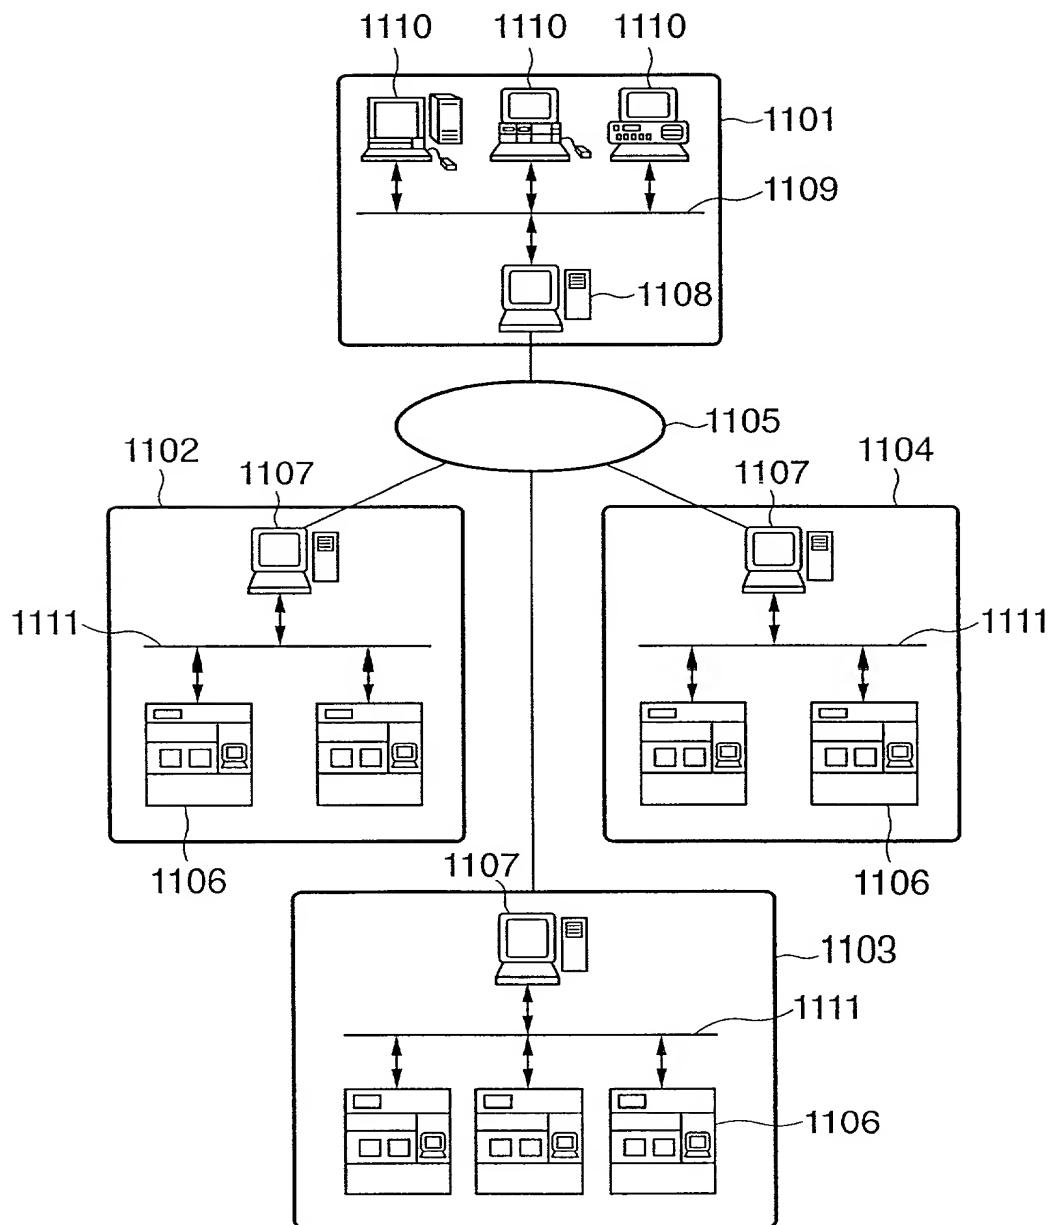**F I G. 6**

10090463 \* 030502

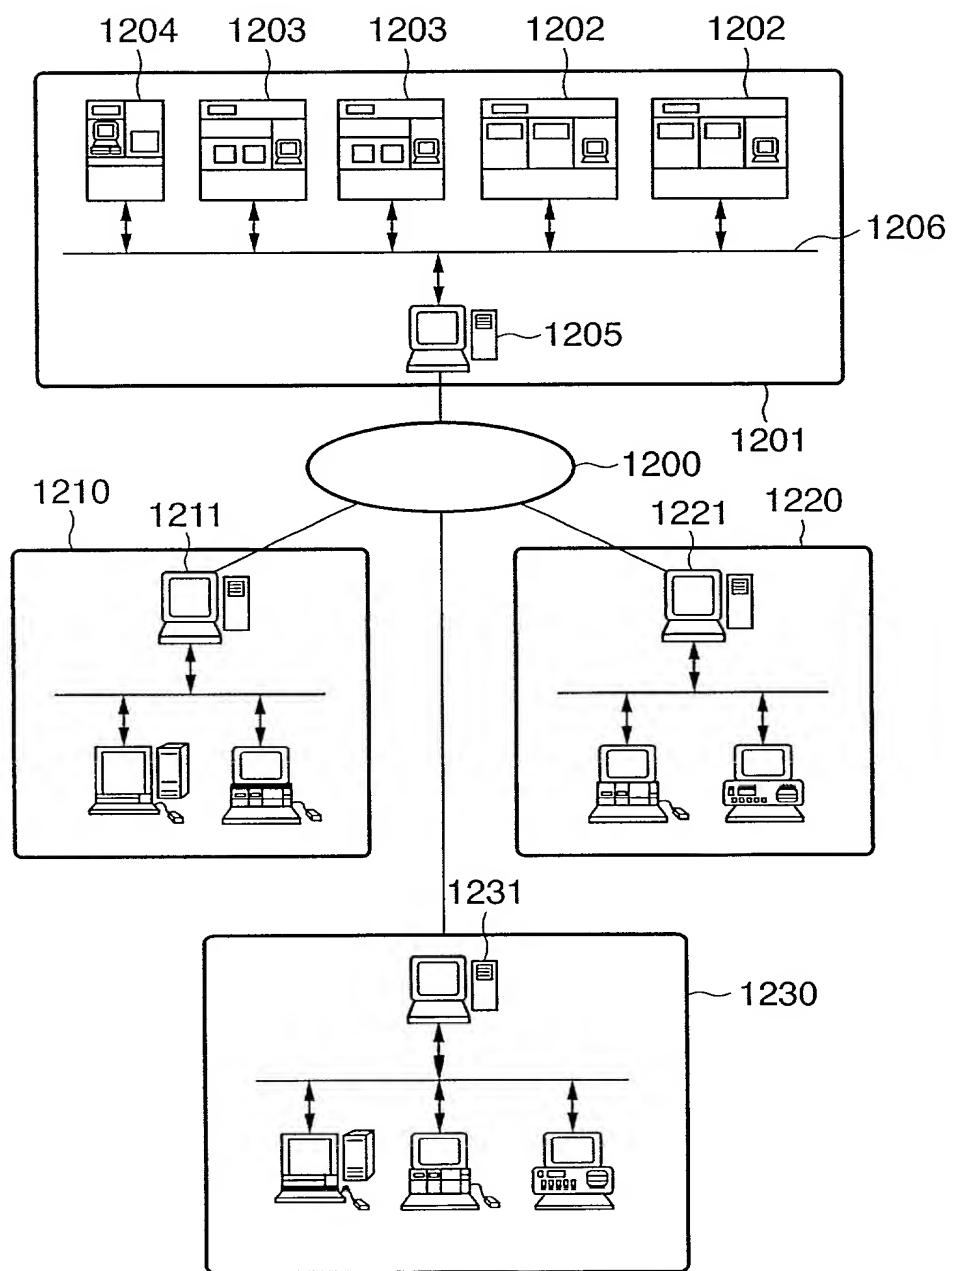
**F I G. 7**

## FIG. 8

URL <http://www.maintain.co.jp/db/input.html>

TROUBLE DB INPUT WINDOW

OCCURRENCE DATE	<input type="text" value="2000/3/15"/> 1404	
TYPE OF APPARATUS	<input type="text" value="* * * * * * * * * *"/> 1401	
OBJECT	<input type="text" value="OPERATION ERROR (START-UP ERROR)"/> 1403	
DEVICE S/N	<input type="text" value="465NS4580001"/> 1402	
DEGREE OF URGENCY	<input type="text" value="D"/> 1405	
SYMPTOM	<input type="text" value="LED KEEPS FLICKERING&lt;br/&gt;AFTER POWER ON"/> ↗ ↘ ↙ ↘	1406
REMEDY	<input type="text" value="POWER ON AGAIN&lt;br/&gt;(PRESS RED BUTTON IN ACTIVATION)"/> ↗ ↘ ↙ ↘	1407
PROGRESS	<input type="text" value="INTERIM HAS BEEN DONE"/> ↗ ↘ ↙ ↘	1408
<input type="button" value="SEND"/> <input type="button" value="RESET"/>		1410      1411      1412
<a href="#">LINK TO RESULT LIST DATABASE</a> <a href="#">SOFTWARE LIBRARY</a> <a href="#">OPERATION GUIDE</a>		

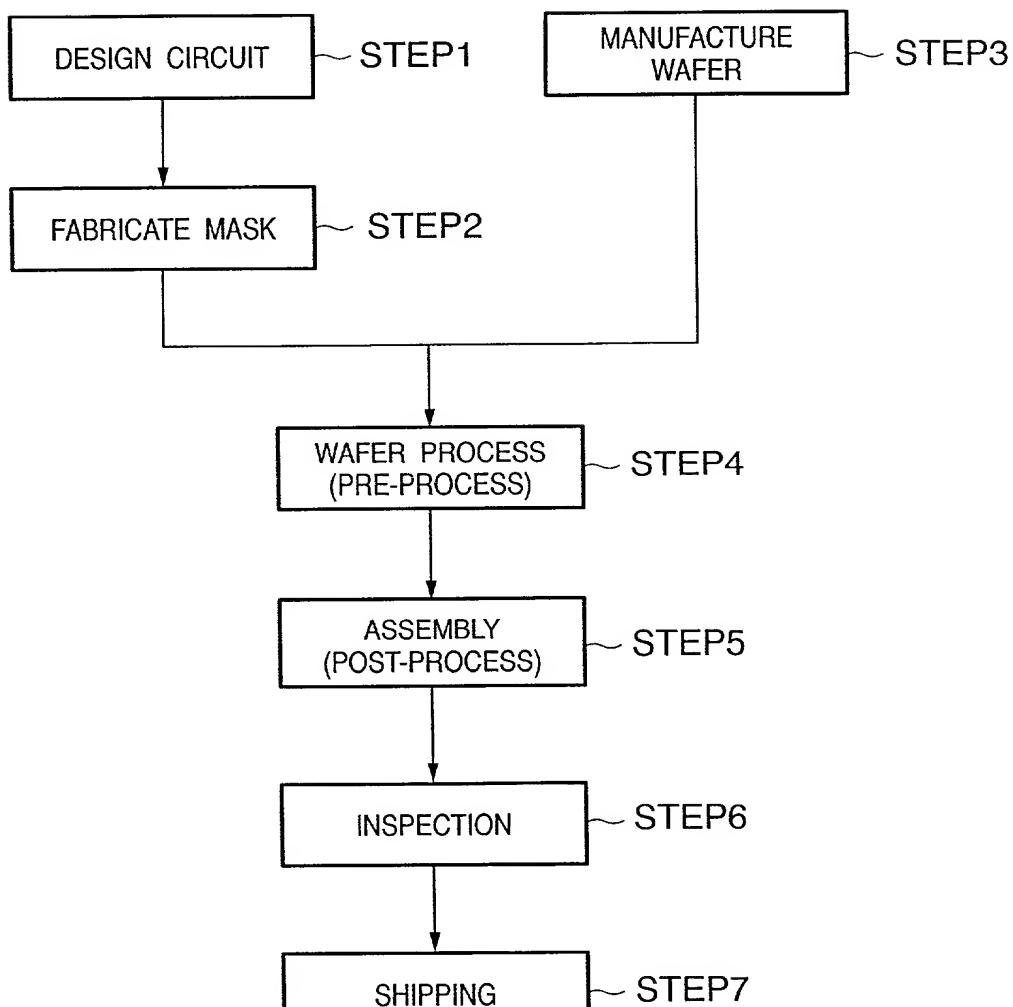**F I G. 9**

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

FIG. 10

